



**HAL**  
open science

# Unlocking CO<sub>2</sub> Infrastructure Deployment The Impact of Carbon Removal Accounting

Emma Jagu, Olivier Massol

► **To cite this version:**

Emma Jagu, Olivier Massol. Unlocking CO<sub>2</sub> Infrastructure Deployment The Impact of Carbon Removal Accounting: IFPEN Economic Papers, n°147. 2022. hal-03609403

**HAL Id: hal-03609403**

**<https://ifp.hal.science/hal-03609403>**

Preprint submitted on 15 Mar 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# IFPEN ECONOMIC PAPERS

IFP SCHOOL - IFPEN

N° 147

FEBRUARY • 2022

## RESEARCH

### UNLOCKING CO<sub>2</sub> INFRASTRUCTURE DEPLOYMENT: THE IMPACT OF CARBON REMOVAL ACCOUNTING

This paper examines the interactions between carbon removal accounting (which determines financial incentives for BECCS) and optimal CO<sub>2</sub> infrastructure deployment by asking how certification affects the feasibility of BECCS projects.

**Emma Jagu**  
**Olivier Massol**

La collection **“IFPEN Economic Papers”** – anciennement « Les Cahiers de l’Économie », depuis 1990 – a pour objectif de présenter des travaux réalisés à IFP Energies nouvelles et IFP School qui traitent d’économie, de finance ou de gestion de la transition énergétique. La forme et le fond peuvent encore être provisoires, notamment pour susciter des échanges de points de vue sur les sujets abordés. Les opinions exprimées dans cette collection appartiennent à leurs auteurs et ne reflètent pas nécessairement le point de vue d’IFP Energies nouvelles ou d’IFP School. Ni ces institutions ni les auteurs n’acceptent une quelconque responsabilité pour les pertes ou dommages éventuellement subis suite à l’utilisation ou à la confiance accordée au contenu de ces publications.

Pour toute information sur le contenu, contacter directement l’auteur.

The collection **“IFPEN Economic Papers”** – formerly « Les Cahiers de l’Économie », since 1990 – aims to present work carried out at IFP Energies nouvelles and IFP School dealing with economics, finance or management of the energy transition. The form and content may still be provisional, in particular to encourage an exchange of views on the subjects covered. The opinions expressed in this collection are those of the authors and do not necessarily reflect the views of IFP Energies nouvelles or IFP School. Neither these institutions nor the authors accept any liability for loss or damage incurred as a result of the use of or reliance on the content of these publications.

For any information on the content, please contact the author directly.

**Pour toute information complémentaire  
For any additional information**

**Victor Court**

IFP School

Centre Economie et Management de l’Energie  
Center for Energy Economics and Management

victor.court@ifpen.fr

Tél +33 1 47 52 73 17

# Unlocking CO<sub>2</sub> infrastructure deployment: The impact of carbon removal accounting

Emma JAGU *a,b,c\**

Olivier MASSOL *a,b,c,d,e*

a IFP Énergies nouvelles, 1-4 av. de Bois Préau, 92852 Rueil-Malmaison, France.

b Center for Energy Economics and Management, IFP School, 228-232 av. Napoléon Bonaparte, 92852 Rueil-Malmaison, France.

c Laboratoire de Génie Industriel, CentraleSupélec, Université Paris Saclay, 9 ter rue Joliot-Curie, 92190 Gif-sur-Yvette, France

d Department of Economics, City, University of London, Northampton Square, London EC1V 0HB, UK.

e Climate Economics Chair, Palais Brongniart, 28 place de la Bourse, 75002 Paris, France.

\* Corresponding author. E-mail address: [emma.jagu@ifpen.fr](mailto:emma.jagu@ifpen.fr)

## *Abstract*

Carbon removal certification may become a powerful instrument to accelerate decarbonization efforts. In Europe, its implementation is expected to foster the deployment of Bioenergy with Carbon Capture and Storage (BECCS). Yet, the large-scale adoption of BECCS is also limited by the availability of a costly CO<sub>2</sub> transportation infrastructure shared with fossil-fueled emitters. In this paper, we examine the interactions between carbon removal accounting (which determines financial incentives for BECCS) and optimal CO<sub>2</sub> infrastructure deployment by asking how certification affects the feasibility of BECCS projects. We propose an original economic framework to explore this question and apply it to a real case study in Sweden. We show that, although a carbon removal accounting framework based on a lifecycle methodology discourages investment in inefficient BECCS processes, it may lead to locking out BECCS from CO<sub>2</sub> infrastructures. Our results suggest that a trade-off must be found between accurately evaluating carbon removal and avoiding BECCS lock-out. We formulate two policy recommendations to overcome this trade-off: (i) deploying sustainable biomass certification to incentivize more carbon-efficient BECCS process, and (ii) stimulating public and private demand for carbon removal credits to induce a higher price for sustainable carbon removal than for carbon mitigation.

---

*Keywords:* Carbon removal accounting, Carbon removal certification, Negative Emissions, Bioenergy Energy with Carbon Capture and Storage, CO<sub>2</sub> infrastructures

# 1. Introduction

Bio-energy with Carbon Capture and Storage (BECCS) and Fossil energy with Carbon Capture and Storage (FECCS) are frequently depicted as key to limiting global warming to 1.5°C (Bosetti et al., 2015; Koelbl et al., 2014; Nemet et al., 2018; Rogelj et al., 2018) and to reaching regional carbon budgets (Bistline et al., 2018; Di Sbroiavacca et al., 2016; Huang et al., 2020; Kalkuhl et al., 2015; Rajbhandari and Limmeechokchai, 2021; Ricci and Selsosse, 2013; Solano Rodriguez et al., 2017). FECCS is expected to mitigate CO<sub>2</sub> emissions from otherwise difficult-to-decarbonize industries, especially when electrification is challenging (Benhelal et al., 2013; Griffin et al., 2018; IEA, 2017). BECCS has the potential of removing CO<sub>2</sub> from the atmosphere by combining the natural carbon sequestration potential of biomass growth with the permanent CO<sub>2</sub> storage potential of CCS (Gough and Upham, 2011; Smith et al., 2016). Although the global annual CO<sub>2</sub> removal capacity of BECCS is expected to scale up from the Megaton magnitude today to the Gigaton magnitude by 2050, its current uptake remains limited (Fuss et al., 2018; Nemet et al., 2018).

The barriers to the up-scaling of BECCS and FECCS are mostly economic, political, and social rather than technical, as some carbon capture, transport, and storage technologies are already in commercial stages (Hammond, 2018). One of these crucial yet often-overlooked barriers is the deployment of CO<sub>2</sub> transportation and storage infrastructures, which are, by nature, costly, capital intensive, and likely to exhibit substantial economies of scale (Butnar et al., 2020; Krahé et al., 2013). A large and growing literature on CO<sub>2</sub> pipeline deployment has already highlighted the need for shared infrastructures with either a regional/national scale (Kemp and Kasim, 2010; Klock et al., 2010; Massol et al., 2018, 2015; Middleton and Bielicki, 2009; Spiecker et al., 2014) or a continental (European) scale (Morbee, 2014; Morbee et al., 2012; Oei and Mendelevitch, 2016). It is important to stress that these studies concentrate on infrastructures that are solely connected to FECCS emitters, *de facto* overlooking the access of BECCS emitters to the infrastructure. This omission is not so surprising as the economics of joint BECCS-FECCS infrastructure projects have, to the best of our knowledge, never been examined before. Furthermore, FECCS and BECCS emitters do not face the same incentives to join a shared CO<sub>2</sub> infrastructure. While European fossil-fueled emitters can benefit from carbon tax reductions or quotas

by installing CCS (Banal-Estañol et al., 2016; Comello and Reichelstein, 2014), carbon removal accounting frameworks for bioenergy-fueled emitters are still under development.

To incentivize the implementation of BECCS, several studies have suggested the creation of carbon removal credits (also called negative emissions credits) that could be auctioned to hard-to-decarbonize sectors (Cabral et al., 2019; Torvanger, 2019; Zakkour et al., 2014). Article 6.4. of the Paris Agreement – of which operational rules were finalized during COP26 – could be a relevant basis for such transfers (Honegger and Reiner, 2018). However, robust international carbon removal accounting frameworks are still missing. The carbon removal potential of BECCS is counterbalanced by process emissions, which could stem from: direct and indirect land use; biomass harvesting, transporting, and processing; or carbon capture, transportation, and storage processes (Fajardy and Mac Dowell, 2017). The amount of carbon removal credits allocated to a BECCS plant will hence depend significantly on the accounting scope – *i.e.*, which process emissions are accounted for when calculating how much CO<sub>2</sub> is removed from the atmosphere by a BECCS plant (Thornley and Mohr, 2018). A legislative proposal on carbon removal certification in the European Union is expected by the end of 2022 (European Parliament, 2021).

This paper contributes to the ongoing policy discussion on carbon removal and BECCS deployment by examining how the specific rules governing carbon removal accounting affect the feasibility of joint FECCS and BECCS CO<sub>2</sub> infrastructure projects. We find that a large scope for carbon removal accounting avoids adverse effects (*e.g.*, incentivizing a BECCS project that does not, in reality, remove CO<sub>2</sub> from the atmosphere), but it may also lead to locking out BECCS projects from CO<sub>2</sub> infrastructures if process emissions are too high. This lock-out effect of BECCS had been described in Lomax et al. (2015) and Vergragt et al. (2011) but had never been modeled.

The remainder of this paper is organized as follows. In the next section, we present the conceptual framework of our analysis. In Section 3, we detail an application of this methodology to the case of a contemporary project in Sweden. Section 4 contains our results. Finally, Section 5 offers a summary and some concluding remarks highlighting the policy implications of our analysis. For the sake of clarity,

the detailed structure of the computerized model and the cost parameters are presented in the Supplementary Document.

## 2. Methodology

This section first introduces our assumptions and notations. We then develop a method to evaluate economically desirable CCS deployments. More specifically, we consider a set of fossil-fueled and bioenergy-fueled candidates for CCS adoption, and compute which ones would invest in carbon capture capabilities to form a shared CO<sub>2</sub> infrastructure under various carbon removal accounting scenarios. A graphical representation of the model can be found in Supplementary Document (Appendix A).

### 2.1 Assumptions and notations

We consider a finite set of industrial plants that can form a CCS coalition connected to a unique storage site. We assume that each CO<sub>2</sub> emitter represents an autonomous decision-making entity that can either adopt or renounce CO<sub>2</sub> capture. We let  $N$  denote the set of all the emitters and  $|N|$  denote its cardinality. An emitter is either fossil- or bioenergy-fueled. This set is thus partitioned in two mutually exclusive subgroups: Fossil energy with Carbon Capture and Storage (*FECCS*) and Bioenergy with Carbon Capture and Storage (*BECCS*).

We let  $\chi_i$  denote the unit cost incurred by emitter  $i$  for the carbon capture operations conducted at its industrial site. We let  $\sigma$  denote the unit carbon storage cost. The storage site is a sizeable underground geological structure located offshore. Consistent with the situation prevailing in the North Sea, we assume that its capacity is known and far larger than the cumulated volume of CO<sub>2</sub> that can be captured at the industrial sites under scrutiny. Finally, CO<sub>2</sub> transportation systems are, by nature, costly, capital intensive, and likely to exhibit substantial economies of scale. These properties effectuate the use of a shared infrastructure. Therefore, CO<sub>2</sub> transportation costs  $C(S)$  depend on which coalition of emitters  $S \subset N$  accepts to form a shared infrastructure. If  $Q_i^{stored}$  represents the quantity of CO<sub>2</sub> captured and stored at emitter  $i$ , total costs are:

$$Total\ costs = \sum_{i \in N} (\chi_i + \sigma) Q_i^{stored} + C(S)$$

In the application discussed in this paper, the transportation cost  $C(S)$  incurred by a coalition  $S$  is computed using an engineering optimization model that is solved numerically. This optimization problem aims to determine the least-costly logistics for transporting the annual volumes of CO<sub>2</sub> captured at a given collection of emitters to the storage site. Following Morbee et al. (2012) and Massol et al. (2015), this model aims at choosing the transportation routes (i.e., the pipelines and shipping routes) that minimize the total annual equivalent cost of building and operating the transportation and storage infrastructure. More precisely, it considers a predefined topology that includes a finite list of nodes representing the emitters, the possible maritime terminals, and the offshore storage site, as well as a predefined list of arcs representing the candidate pipelines and shipping routes connecting these nodes. From a cost perspective, each arc is characterized by a fixed and a unit cost component. Because of the fixed cost, there are arc-specific economies of scale. The complete specification of this problem is detailed in the Supplementary Document (Annex B).

## 2.2 Gross surplus: carbon accounting considerations

We let  $p_{CO_2}$  denote the prevailing price of carbon. Each emitter  $i$  can be attributed  $Q_i^{avoided}$  tons of avoided CO<sub>2</sub> emissions. We can thus define the financial total gross income as:

$$Total\ gross\ income = p_{CO_2} \sum_{i \in N} Q_i^{avoided}$$

In the case of fossil-fueled emitters, we assume  $Q_i^{avoided}$  the quantity of avoided CO<sub>2</sub> to be equal to  $Q_i^{stored}$  the quantity of captured and stored CO<sub>2</sub>. This assumption is acceptable in our case study, as Sweden's electricity system is close to carbon neutral (Garðarsdóttir et al., 2018).

$$Q_i^{avoided} = Q_i^{stored} \quad \forall i \in N^{FECCS}$$



In the case of bioenergy-fueled emitters, the quantity of avoided CO<sub>2</sub> corresponds to the amount of CO<sub>2</sub> removed from the atmosphere by the BECCS process (Torvanger, 2019). In a simplified view, carbon removal can be calculated by deducing process emissions<sup>1</sup> from stored emissions. We note  $\tau$  the ratio between  $Q^{process}$ , the process emissions within the scope of the methodology and  $Q^{stored}$ , the CO<sub>2</sub> permanently stored.

$$Q_i^{avoided} = Q_i^{stored} - Q_i^{process} = Q_i^{stored}(1 - \tau) \quad \forall i \in N^{BECCS}$$

The calculation of carbon removal depends on the accounting scope – i.e., elements of the value chain – retained for accounting (Gough et al., 2018; Thornley and Mohr, 2018). An example best illustrates the consequences of the choice of the accounting scope. In a whole-system analysis, Fajardy and Mac Dowell (2017) assess the process emissions of a BECCS system in two cases. One where land-use change is included in the accounting scope, one where land-use change is excluded. When land-use change is excluded,  $\tau$  reaches 60%. For each ton of stored emissions, 400 kilograms of CO<sub>2</sub> is effectively removed from the atmosphere. However, when land-use change emissions are included, the ratio  $\tau$  between process and stored emissions is larger than 1: there is no carbon removal. We will assess the impact of carbon removal accounting on CO<sub>2</sub> infrastructure deployment by testing different scenarios on  $\tau$ , the ratio between process emissions and stored emissions.

### 2.3 Economically desirable CCS deployment

We now want to assess which emitters should install carbon capture. Given the prevailing carbon price  $p_{CO_2}$ , the net surplus  $W(p_{CO_2}, S)$  yielded by the deployment of CCS technologies at a given coalition  $S$  is obtained as the difference between the total gross income obtained by the participating emitters and the total cost incurred to conduct the capture, transportation, and storage operations, that is:

---

<sup>1</sup> Process emissions could include, for example: greenhouse gas emissions stemming from biomass harvesting, transporting and processing, electricity consumption, CO<sub>2</sub> leakage.

$$W(p_{CO_2}, S) = p_{CO_2} (\sum_{i \in S} Q_i^{avoided}) - \sum_{i \in S} (\chi_i + \sigma) Q_i^{stored} - C(S) \quad (1)$$

A given coalition  $S$  is said to be dominated whenever there is no carbon price such that the net surplus obtained with  $S$  can be greater than or equal to that obtained with any other nonempty subgroup of emitters that can be formed in  $N$ . Hence, formally checking whether  $S$  is dominated is logically equivalent to verifying whether the set  $\{p_{CO_2} \in \mathbb{R}^+ : W(p_{CO_2}, S) \geq W(p_{CO_2}, S'), \forall S' \subseteq N \setminus \{S, \emptyset\}\}$  is empty. From a practical perspective, the emptiness of this set can be verified for the specific coalition  $S$  by solving the following linear programming problem:

LP1:

$$\begin{aligned} & \min_{p_{CO_2}} p_{CO_2} \\ & \text{s.t.} \quad W(p_{CO_2}, S) \geq W(p_{CO_2}, S') \quad \forall S' \subseteq N \setminus \{S, \emptyset\} \\ & \quad \quad p_{CO_2} \geq 0 \end{aligned}$$

If the linear programming solver yields no solution to LP1, the coalition at hand is dominated.<sup>2</sup> In contrast, if a solution is found, there exists a nonempty range of carbon prices such that the coalition  $S$  provides the largest net surplus among all the coalitions that can be formed. The solution of LP1 also provides the minimum carbon price at which that coalition is dominating the other coalitions. Hereafter, we let  $\underline{p}_{CO_2}^S$  denote the carbon price that is a solution to LP1.

By iteratively solving this problem for each of the  $2^{|N|}$  coalitions that can be formed in  $N$ , we can thus partition the list of possible coalitions in two sets depending on whether they are dominated or not. We discard the dominated coalitions and concentrate our attention on the undominated ones. Ordering the undominated coalitions ascending values of  $\underline{p}_{CO_2}^S$ , we can identify a range of carbon price values

---

<sup>2</sup> Indeed, one can remark that the objective function is bounded from below (because the carbon price is compelled to be nonnegative). The Fundamental Theorem of Linear Programming indicates that there exists at least one optimal solution to the program LP1 whenever the feasible set is nonempty. Hence, if a solution cannot be yielded using a LP solver, we can conclude that the feasible set is empty which means that, for any nonnegative carbon price, there exists at least an alternative cluster of emitters capable to yield a larger net surplus than the one obtained with the cluster at hand.

such that this particular coalition is desirable. For a given coalition  $S_j$  in the ordered list  $\{S_1, \dots, S_k\}$ , that range is:  $\left[ \underline{p_{CO_2}^{S_j}}, \underline{p_{CO_2}^{S_{j+1}}} \right)$ .

It is important to stress that this range is not necessarily such that a positive net surplus can be yielded by that coalition. Indeed, if an undominated coalition  $S_j$  is such that  $W(p_{CO_2}, S) < 0$  for a prevailing carbon price in the range  $\underline{p_{CO_2}^{S_j}} \leq p_{CO_2} \leq \underline{p_{CO_2}^{S_{j+1}}}$ , the gross income is not sufficient to recoup the cost of the CCS chain. This desirable coalition can only adopt carbon capture and storage at that price unless some form of public support is provided (*e.g.*, through subsidies or tax relief (Cox and Edwards, 2019)).

We thus also compute the break-even price, the minimum carbon price needed for  $S$  to obtain a nonnegative surplus:

$$\overline{p_{CO_2}^S} := \frac{\sum_{i \in S} (\chi_i + \sigma) Q_i^{stored} + C(S)}{\sum_{i \in S} Q_i^{avoided}} \quad (2)$$

### 3. Data: a Swedish case study

Sweden presents many features that scaffold BECCS and FECCS deployment as an effective decarbonization option to meet the nation's ambitious climate objectives. First, carbon capture represents a suitable decarbonisation path. The country's power sector is already dominated by low emissions technologies (nuclear and hydroelectricity), and Sweden hosts a number of large carbon-intensive industrial facilities that can potentially be equipped with carbon capture capabilities: refineries, petrochemical plants, iron and steel factories, cement production (Garðarsdóttir et al., 2018; Johnsson et al., 2020).

Second, Sweden is part of Scandinavia, a region endowed with favorable geology for CO<sub>2</sub> storage. Mature aquifer storage capacity has been identified in Norway, and a sizable offshore storage site has now been developed there as part of an ambitious CCS project labeled Northern Lights (Adriana et al., 2021). Regarding CO<sub>2</sub> infrastructure deployment, cabotage is envisioned to connect large Swedish coastal emitters to the Norwegian storage site.

Last but not least, the emergence of FECCS also provides Sweden with an opportunity to unlock its BECCS potential. The country is endowed with an important biomass-fueled pulp and paper industry, which also represents a primary source of industrial CO<sub>2</sub> emissions (EEA, 2017). Equipping these processing plants with carbon capture units is deemed to be technically feasible (Garðarsdóttir et al., 2018), and once equipped, the pulp and paper plants may be considered as BECCS. The deployment of such BECCS capabilities could provide the country with a credible option for generating negative CO<sub>2</sub> emissions. In recognition of this, the government has explicitly listed BECCS deployment as a supplementary measure to reach the country's carbon neutrality target by 2045 (Regeringskansliet, 2018). Altogether, these specific features make Sweden a realistic case for studying the economics of the combined deployment of FECCS and BECCS.

### *3.1 The emitters, the storage site, and the associated logistics*


We focus on the southwestern part of Sweden, where industrial plants could be connected to the Northern Lights project in the future. Following Kjærstad et al., (2016), we select a coalition of emitters within a 300km range from Lysekil<sup>3</sup> that have annual emissions volumes larger than 500 ktCO<sub>2</sub> per annum in 2017 (EEA, 2017).

The resulting list includes seven industrial sites where carbon capture capabilities can be installed (see Table 1 and Figure 1). Each of these emitters is labeled from E1 to E7. Three of them have a coastal location, in the vicinity of deep-ports in Lysekil (E7), Stenungsung (E3), and Göteborg (E1). Conceivably, each of these three ports can be equipped with CO<sub>2</sub> loading facilities and is thus considered a potential maritime terminal. The four remaining emitters are located in the hinterland (notably, the pulp and paper plants located north of the Vänern lake). We assume that all emissions are directed to a single storage site in Norway – the storage site deployed within the Northern Lights project – Figure 1).

---

<sup>3</sup> A FECCS project is currently under scrutiny at the Preem refinery in Lysekil which calls for further appraisal of the FECCS/BECCS potential in that area (Adriana et al., 2021; Gardarsdottir et al., 2021).

**Figure 1: The envisioned BECCS/FECCS project: the Norwegian storage site and the Swedish emission nodes**

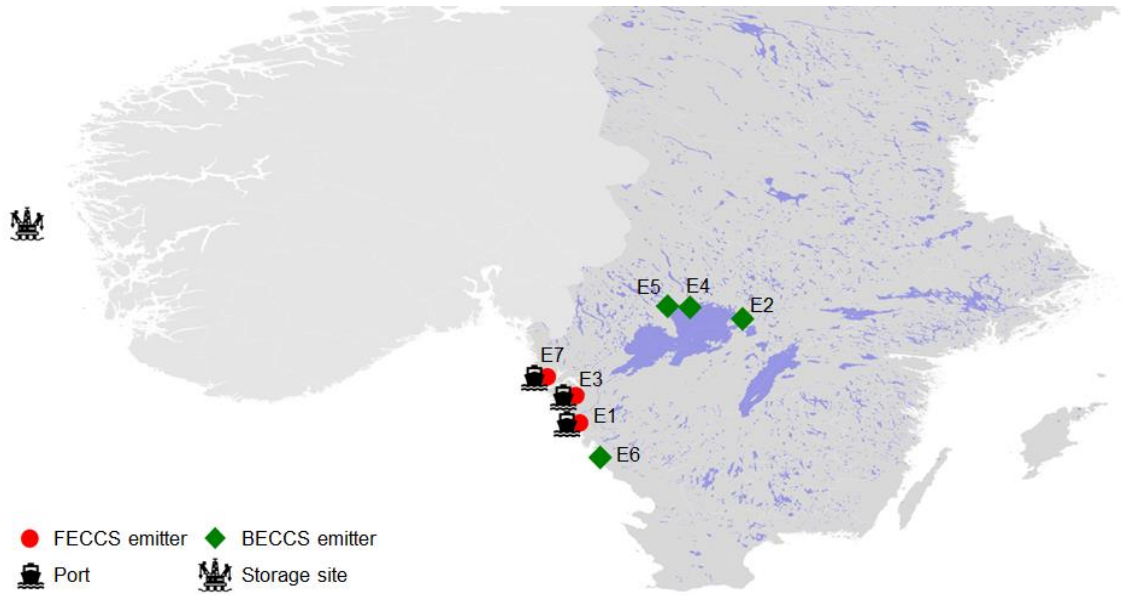

The BECCS/FECCS chain in question thus requires the installation of (i) an onshore pipeline system aimed at gathering the emissions captured at the industrial sites and transporting them to the Swedish ports; and (ii) one or several maritime supply chain(s) based on sea-going vessels transporting the CO<sub>2</sub> from these Swedish ports to the offshore storage site in Norway. Regarding the maritime component of the chain, we disregard the possibility of building an offshore pipeline in favor of shipping lines. The analyses in Kjärstad et al. (2016) and Svensson et al. (2004) indicate that shipping provides the cheapest technological option for the volume and the distance under scrutiny.

Our parameterization considers a total of nine nodes including: the seven emission nodes E1 to E7, an intersection node labeled R1 that represents a possible network intersection between candidate pipelines, and a unique offshore storage site (Table 1).


**Table 1: The nodes**

| Node | Nature   | Facility name        | Industry             |
|------|----------|----------------------|----------------------|
| E1   | Emission | St1 Refinery AB      | Refinery             |
| E2   | Emission | Bäckhammars Bruk     | Pulp and Paper plant |
| E3   | Emission | Borealis Krackeranl. | Petrochemical        |
| E4   | Emission | Skoghalls Bruk       | Pulp and Paper plant |
| E5   | Emission | Gruvöns bruk         | Pulp and Paper plant |

|    |          |                            |                      |
|----|----------|----------------------------|----------------------|
| E6 | Emission | Södra Cell Värö            | Pulp and Paper plant |
| E7 | Emission | Preemraff Lysekil          | Refinery             |
| R1 | Routing  |                            |                      |
| S1 | Storage  | The Norwegian storage site |                      |

Regarding onshore transportation, we consider a predefined set of ten candidate pipelines that can be installed in that part of Sweden (see Figure 2). These pipelines are located along the region’s main transport corridors. Point-to-point shipping is selected for offshore transportation between the three ports and the storage site located on the Norwegian continental shelf. Cabotage is also allowed between port locations. The exact lengths of pipelines and shipping lines are available in the Supplementary Document (Appendix D).

**Figure 2: The candidate pipelines and shipping lines**

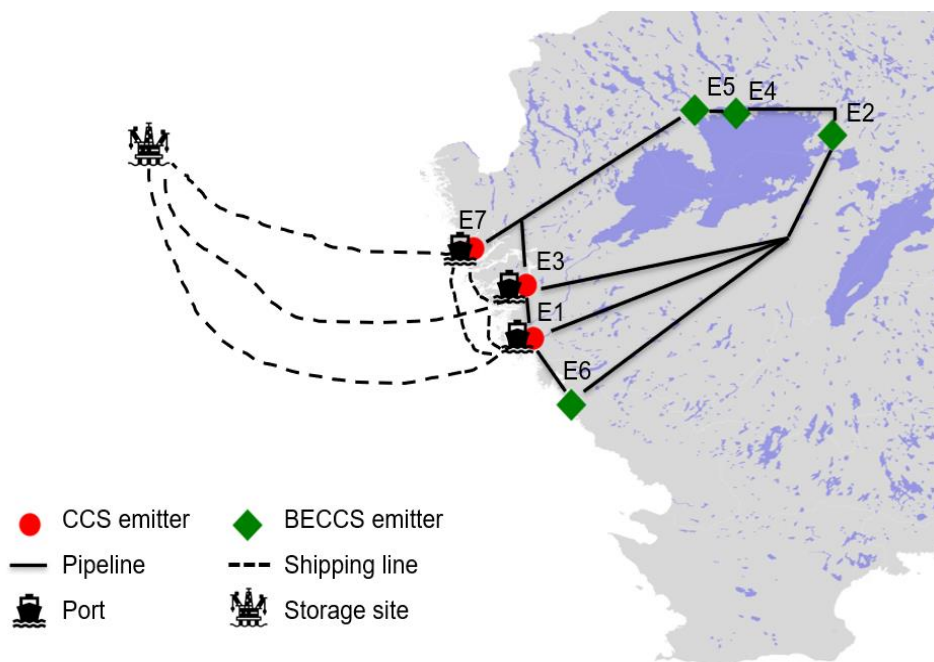

### 3.2 Cost data

Our cost data is extracted from earlier techno-economic studies (Garðarsdóttir et al., 2018; Johnsson et al., 2020; Roussanaly et al., 2014; ZEP, 2011). Costs are reported in €<sub>2015</sub> and are levelized assuming 25 years of economic lifetime and a 7.5% discount rate.

### CO<sub>2</sub> capture

Carbon dioxide capture costs vary significantly depending on the considered sector and technology. CO<sub>2</sub> combustion emissions are most cost-effectively captured at stacks with high flue gas concentration and volumes. We use specific cost estimations from the work of Garðarsdóttir et al. (2018) and Johnsson et al. (2020). We assume that carbon capture is only installed at the industrial units with the lowest carbon capture cost of each plant (*e.g.*, the recovery boiler in the pulp and paper plants). Table 2 gathers the share of emissions of the industrial unit, capture rates and costs for the selection of facilities in our application case. The total quantity of captured CO<sub>2</sub> emissions in our case study is 3.542 MtCO<sub>2</sub>/y per annum, out of which 2.534 MtCO<sub>2</sub>/y biogenic emissions.

**Table 2: Captured volumes and costs in for each emitter (Garðarsdóttir et al., 2018; Johnsson et al., 2020)**

| <b>Node</b> | <b>Sector</b>         | <b>Total CO<sub>2</sub> emissions (MtCO<sub>2</sub>/y)</b> | <b>% of emissions captured</b> | <b>Capture rate</b> | <b>Capture cost €/tCO<sub>2</sub>/y</b> |
|-------------|-----------------------|--|--------------------------------|---------------------|---|
| <b>E1</b>   | <b>Refinery</b>       | 0.535  | 30%                            | 90%                 | 66                                      |
| <b>E2</b>   | <b>Pulp and Paper</b> | 0.546  | 75%                            | 90%                 | 64                                      |
| <b>E3</b>   | <b>Petrochemical</b>  | 0.664  | 80%                            | 90%                 | 61                                      |
| <b>E4</b>   | <b>Pulp and Paper</b> | 0.943  | 75%                            | 90%                 | 56                                      |
| <b>E5</b>   | <b>Pulp and Paper</b> | 1.296  | 75%                            | 90%                 | 53                                      |
| <b>E6</b>   | <b>Pulp and Paper</b> | 0.968  | 75%                            | 90%                 | 52                                      |
| <b>E7</b>   | <b>Refinery</b>       | 1.428  | 30%                            | 90%                 | 50                                      |

### CO<sub>2</sub> transportation: a pipeline system and a maritime supply chain

Following Morbee et al. (2012) and Massol et al. (2018), the construction cost of an onshore point-to-point CO<sub>2</sub> pipeline infrastructure is assumed to be directly proportional to its length. In the present study, we retain the cost parameters presented in Massol et al. (2018).<sup>4</sup> The annual equivalent investment

<sup>4</sup> Original monetary values are in 2010 euros and were corrected for inflation to obtain 2015 euros.

cost of a 100km-long pipeline with an output of  $q$  MtCO<sub>2</sub>/y is:  $(A_0 + B_0q)\gamma$ , where  $A_0 = 4.6045$  is the fixed cost coefficient (in million 2015 euros), the variable cost coefficient is  $B_0 = 0.1647$  in 2015 euros per (tCO<sub>2</sub>×100 km) and  $\gamma = 1.1$  is the dimensionless terrain correction factor described in IEAGHG (2002).<sup>5</sup> Concerning operations and management costs, IEA (2005) indicates operation costs ranging from 1.0 to 2.5 euros per (tCO<sub>2</sub>×100 km). We use a value of 1.5 euros per (tCO<sub>2</sub>×100 km).

Regarding maritime shipping, we follow the “pseudo data” method proposed in Griffin (1979, 1978, 1977) to specify and estimate an empirical function that gives the total annual cost (in M€/y) incurred for transporting a given annual flow of CO<sub>2</sub> over a given distance. The estimation uses the cost-engineering data presented in Roussanaly et al. (2014). The estimation procedure and the retained specifications are detailed in the Supplementary Document (Appendix C).

#### CO<sub>2</sub> storage

We use a cost estimation given for offshore depleted gas oil fields by ZEP (2011), namely 9€/tCO<sub>2</sub> (high-cost scenario). Indeed, the storage site considered in the Northern Lights project will be exploited using existing oil and gas infrastructure on the Norwegian continental shelf (CCS Norway, 2019). In this case, an economic lifetime of 40 years is assumed.

## **4. Results**

This section examines the desirable deployment of a CCS cluster in Sweden under several carbon removal accounting scenarios for BECCS. A crucial decision to be made by policymakers regarding carbon removal is the scope retained for carbon removal accounting (Fajardy and Mac Dowell, 2017; Thornley and Mohr, 2018). Since the wider the scope of carbon removal accounting, the larger the amount of process emissions that is accounted for, we use the ratio  $\tau$  between process emissions and stored emissions as a proxy for accounting rules.

---

<sup>5</sup> Here, we assume that the pipelines are installed on cultivated lands which explains the retained value for that parameter.



We first examine a scenario where process emissions are ignored completely ( $\tau = 0\%$ , Case 1). Then, we assume that the ratio is  $\tau = 60\%$ , based on a case study by Fajardy and Mac Dowell (2017) (Case 2). In both scenarios, we identify the undominated coalitions<sup>6</sup> (see Section 2.2), their CO<sub>2</sub> price ranges<sup>7</sup>, and their break-even prices<sup>8</sup>.

#### 4.1 Case 1: Ignoring process emissions ( $\tau = 0\%$ )

We assume here that each ton of permanently stored CO<sub>2</sub> is considered carbon removal and can be exchanged at the prevailing CO<sub>2</sub> value. This scenario illustrates a still frequent reasoning: process emissions are already accounted for by other stakeholders in other sectors and could therefore be ignored. It is the same rationale that allows bioenergy to be considered carbon neutral. A similar scenario was presented in Laude and Jonen (2013).<sup>9</sup>

The successive undominated coalitions are depicted in Figure 3, and the CO<sub>2</sub> price ranges are gathered in Table 3. The first coalition is emitter E1, a chemical plant. E1 yields the lowest absolute costs due to its small size and coastal location. Therefore, it minimizes losses for CCS investment when the CO<sub>2</sub> value is between 0 and 67€/tCO<sub>2</sub>. But Coalition 1 requires up to 210€/tCO<sub>2</sub> subsidies to ensure that all costs are covered. Coalition 2 consists of E7, the existing FECCS pilot PreemCCS (Adriana et al., 2021; Gardarsdottir et al., 2021). It becomes undominated starting at a carbon value of 67 €/tCO<sub>2</sub>, which is lower than current European Emission Trading System (EU ETS) levels (around 80 €/tCO<sub>2</sub> at the time of writing) but insufficient to cover the total costs of investment. At 80€/tCO<sub>2</sub>, a 40€/tCO<sub>2</sub> subsidy is needed for Preemraff Lysekil's CCS pilot to be economically viable. Additionally, Coalition 2 initiates a consistent sequence of coalitions. With Coalition 3, two new emitters join: E4 and E5, two large pulp and paper plants located inland with lower capture costs. Then E3, E1 and E6, three coastal

---

<sup>6</sup> Recall that at a given CO<sub>2</sub> price, a undominated coalition is a subgroup of emitters that yields more surplus than any other subgroup by investing in CCS.


<sup>7</sup> Recall that the CO<sub>2</sub> price range of a coalition is the CO<sub>2</sub> price range for which the coalition is undominated.

<sup>8</sup> Recall that the break even price of a coalition is the CO<sub>2</sub> price for which the coalition yields a positive surplus.

<sup>9</sup> It should be noted, however, that such accounting method can result in adverse effects (incentivizing a BECCS projects that do not, in reality, remove CO<sub>2</sub> from the atmosphere).

emitters with lower incremental infrastructure costs join in Coalitions 4. At 95 €/tCO<sub>2</sub>, Coalition 4 yields a positive surplus, hence subsidies become unnecessary to initiate investment. Finally, E2, a small pulp and paper plant with high capture cost and incremental infrastructure cost joins in Coalition 5.

**Figure 3: Case 1 – undominated coalitions**

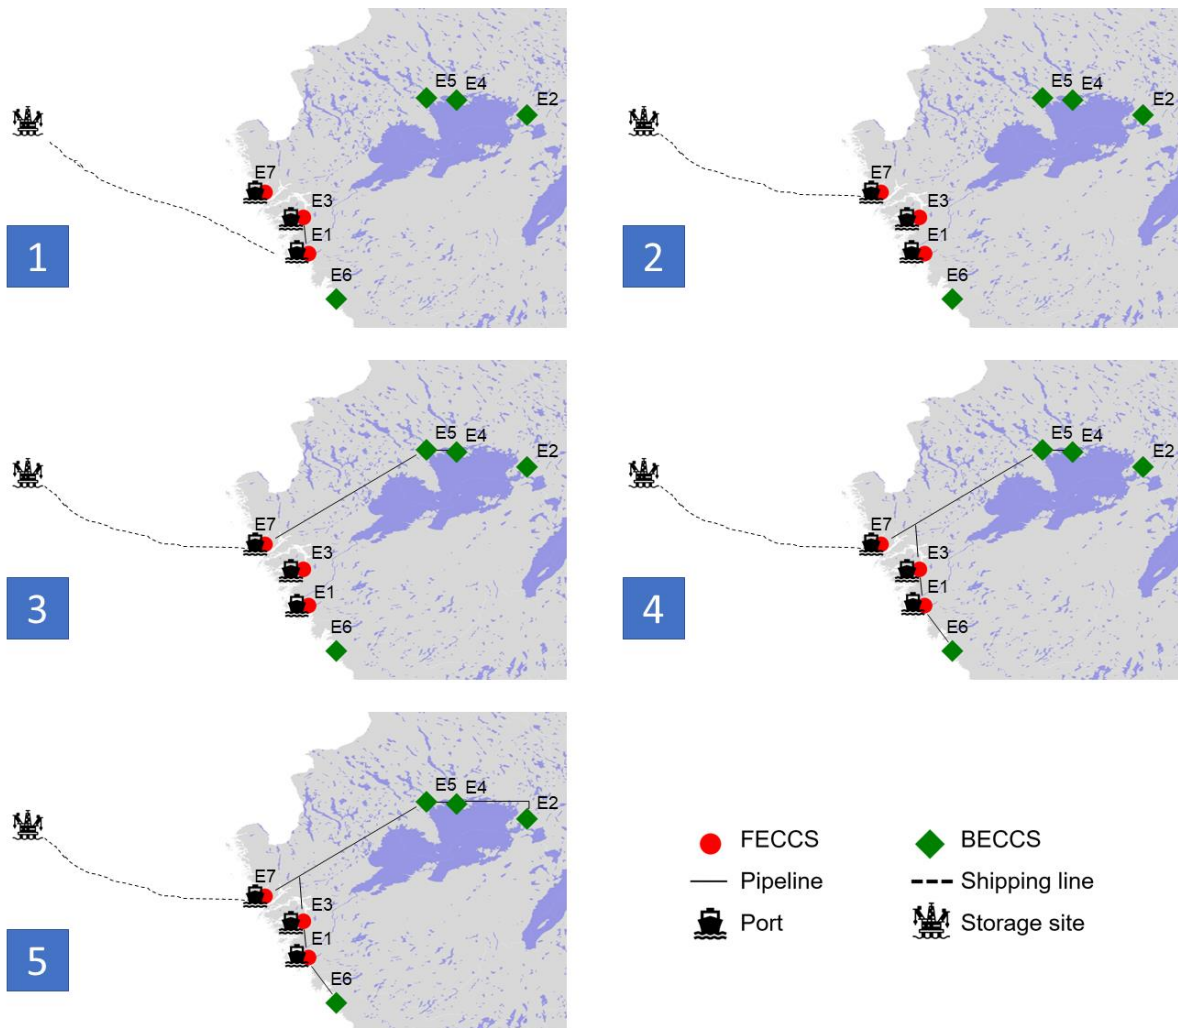

**Table 3: Case 1 – CO<sub>2</sub> price ranges of the undominated coalitions**

| Coalitions $S_j$ |    |    |    |    |    |    |    | Price range (€/tCO <sub>2</sub> ) <sup>(a)</sup> | Break-even price (€/tCO <sub>2</sub> ) <sup>(b)</sup> |
|------------------|----|----|----|----|----|----|----|--|---|
| N°               | E1 | E2 | E3 | E4 | E5 | E6 | E7 | $[p_{CO_2}^{s_j}, p_{CO_2}^{s_{j+1}}[$           | $\underline{p}_{CO_2}^{s_j}$                          |
| 1                | x  |    |    |    |    |    |    | [0, 66[  | 210   |
| 2                |    |    |    |    |    | x  |    | [66, 91[   | 120   |
| 3                |    |    |    | x  | x  |    | x  | [91, 93[   | 97  |
| 4                | x  |    | x  | x  | x  | x  | x  | [93, 105[  | 95  |
| 5                | x  | x  | x  | x  | x  | x  | x  | [105, ...[                                       | 96  |

(a): the range of carbon price values for which Coalition  $s_j$  is undominated

(b): the break-even CO<sub>2</sub> price for which Coalition  $s_j$  yields a positive surplus

#### 4.2 Case 2: Lifecycle based accounting ( $\tau = 60\%$ )


We now assume that carbon removal accounting is based on a lifecycle assessment, which results in only a fraction of permanently stored CO<sub>2</sub> being considered as carbon removal and exchangeable at the prevailing CO<sub>2</sub> value. In this example, the total process emissions of BECCS represent 60% of the volume of stored emissions, consistent with a case study in Fajardy and Mac Dowell (2017), where land-use change is out of the accounting scope. The undominated coalitions and respective CO<sub>2</sub> price ranges are represented in Figure 4 and Table 4.

As expected due to the lower financial incentives for BECCS, the first coalitions to be built only gather FECCS emitters. In absence of subsidies, CCS investment is initiated starting at 107 €/tCO<sub>2</sub> (the break-even price of Coalition 3) – instead of 99 €/tCO<sub>2</sub> as the previous scenario. The first coalition that includes BECCS emitters is undominated at a carbon value of 214 €/tCO<sub>2</sub>; twice the carbon value needed to initiate a CO<sub>2</sub> infrastructure deployment for FECCS emitters. Although lifecycle carbon removal accounting frameworks avoid the adverse effects described in Section 2., it globally raises the carbon value needed to trigger CCS adoption, whether in fossil-fueled industries or bioenergy-fueled industries.

More importantly, our results suggest that the CO<sub>2</sub> infrastructure will first be built for FECCS emitters, and hence may not be accessible for BECCS emitters. Let us assume that the CO<sub>2</sub> value is 112€/tCO<sub>2</sub> and Coalition 4 – E7, E3 and E1 – is built (see Figure 4). The pipeline design likely doesn't

account for future investment in BECCS because their investment will only happen at 214€/tCO<sub>2</sub>. Hence, when the CO<sub>2</sub> value does reach 214€/tCO<sub>2</sub>, the pipeline may not be accessible to emitter E6 (Coalition 5). CO<sub>2</sub> pipeline construction has an irrevocable nature: once installed, their diameter cannot be modified. This is the lock-out effect described in Vergragt et al. (2011) and Lomax et al. (2015).

**Figure 4: Case 2 – undominated coalitions**

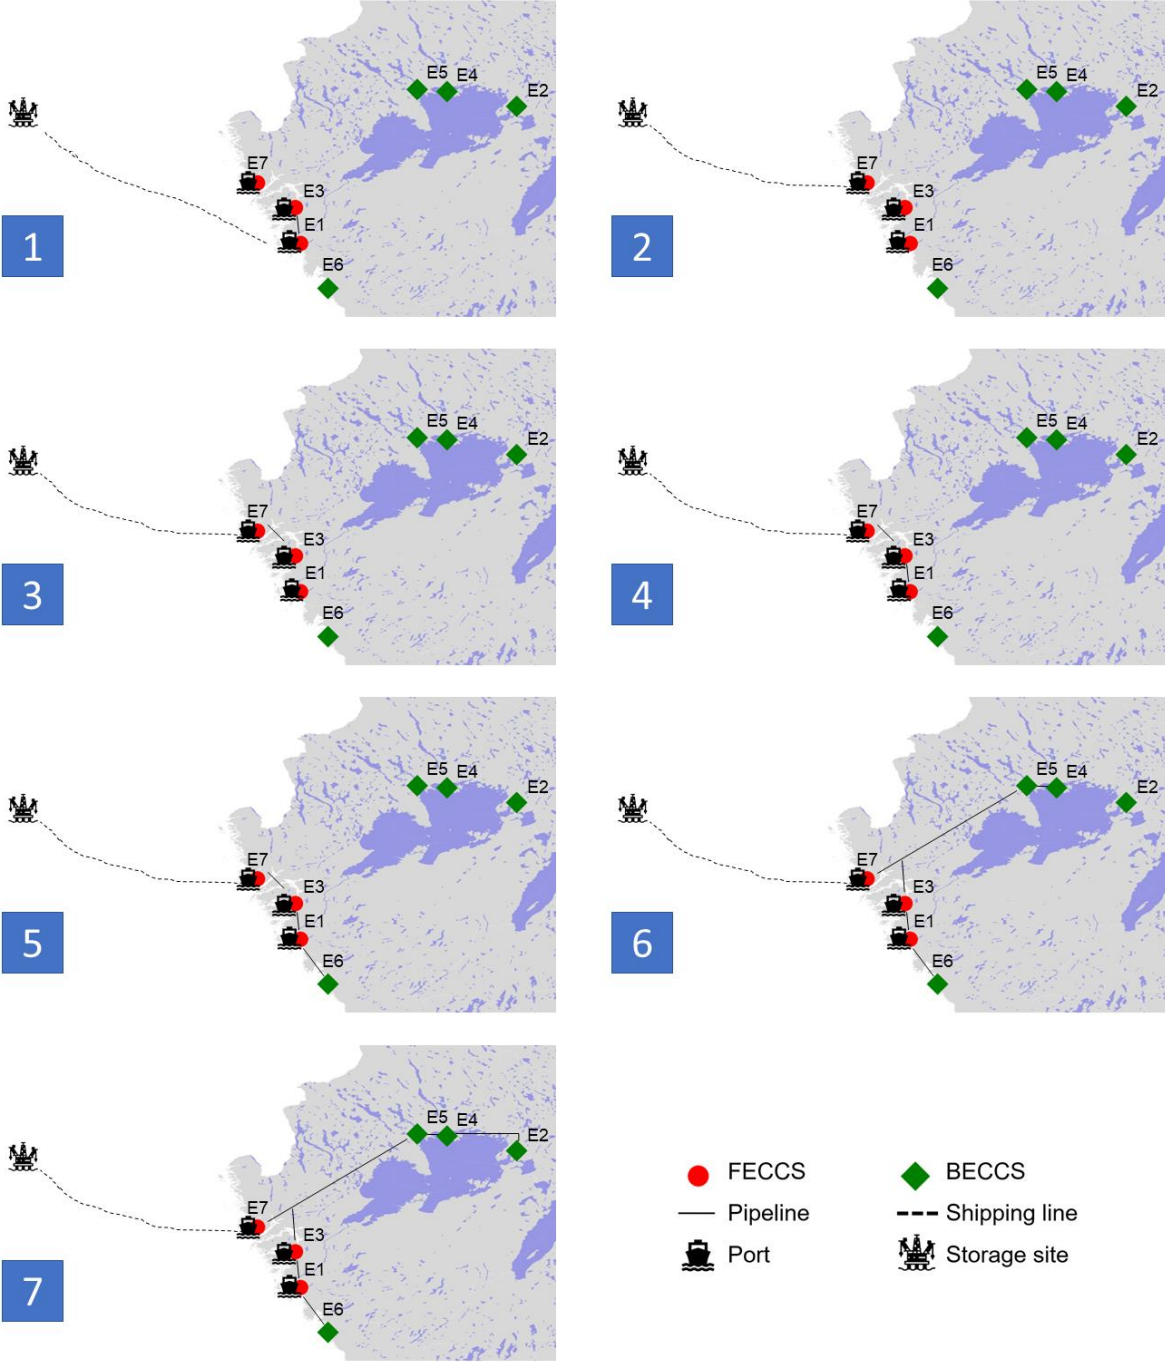

**Table 4: CO<sub>2</sub> price ranges of the socially undominated coalitions**

| Coalitions $S_j$ |    |    |    |    |    |    |    | Price range (€/tCO <sub>2</sub> ) <sup>(a)</sup> | Break-even price (€/tCO <sub>2</sub> ) <sup>(b)</sup> |
|------------------|----|----|----|----|----|----|----|--|---|
| N°               | E1 | E2 | E3 | E4 | E5 | E6 | E7 | $[p_{CO_2}^{S_j}, p_{CO_2}^{S_{j+1}}[$           | $p_{CO_2}^{S_j}$                                      |
| 1                | x  |    |    |    |    |    |    | [0, 66[  | 210   |
| 2                |    |    |    |    |    | x  |    | [66, 98[   | 120   |
| 3                |    |    | x  |    |    |    | x  | [98, 112[  | 107   |
| 4                | x  |    | x  |    |    |    | x  | [112, 214[                                       | 108   |
| 5                | x  |    | x  |    |    | x  | x  | [214, 227[                                       | 130   |
| 6                | x  |    | x  | x  | x  | x  | x  | [227, 263[                                       | 161   |
| 7                | x  | x  | x  | x  | x  | x  | x  | [263,...[  | 169   |

(a): the range of carbon price values for which Coalition  $s_j$  is undominated

(b): the break-even CO<sub>2</sub> price for which Coalition  $s_j$  yields a positive surplus


### 4.3 Lock-out effects ( $\tau \in [0\%, 100\%[$ )

To evaluate the lock-out effect of BECCS within our model, we compare two variables. The lowest break-even price<sup>10</sup> amongst all coalitions regardless of the nature of the emitters – and the minimum CO<sub>2</sub> price for which a coalition that includes BECCS emitters is built (Figure 5). The greater the difference between these two values, the less likely CO<sub>2</sub> infrastructure planning will anticipate investments in BECCS.

We let  $\tau$  vary from 0 to 100%. If the accounted process emissions are low (no more than 20% of stored emissions), there is no difference between the lowest break-even price and the minimum CO<sub>2</sub> price for coalitions with BECCS emitters. However, the difference between break-even prices quickly increases with process emissions, already doubling when process emissions reach 60%. The lock-out effect is thus tightly linked to  $\tau$ , the ratio between the accounted process emissions and the permanently stored emissions.

<sup>10</sup> The break-even price of a coalition is the CO<sub>2</sub> value needed to trigger CCS investment without subsidies

**Figure 5: Comparison between the lowest break-even price and the minimum CO<sub>2</sub> value needed to initiate BECCS investment**

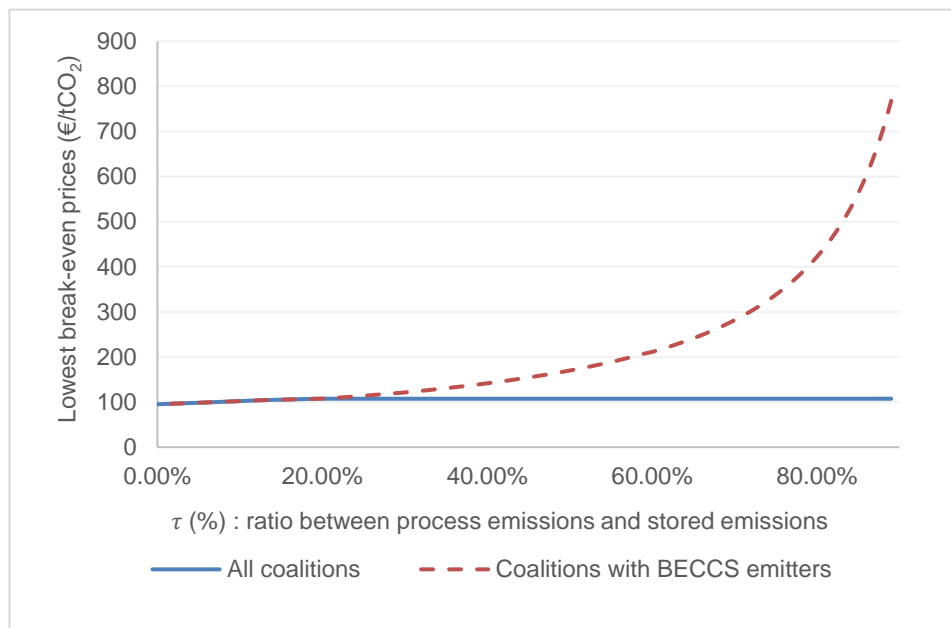

## 5. Conclusion and policy implications

Bioenergy with Carbon Capture and Storage (BECCS) is expected to significantly contribute to limiting global warming to 1.5°C by removing CO<sub>2</sub> from the atmosphere (Rogelj et al., 2018). The upscaling of carbon removal technologies – or negative emissions technologies – requires carbon removal accounting and certification frameworks that have been repeatedly called for in the scientific literature in the past few years (Cabral et al., 2019; Fajardy and Mac Dowell, 2020; Gough et al., 2018; Mac Dowell et al., 2019; Mayer, 2019; Torvanger, 2019). Policy decisions on these frameworks are currently underway: the European Parliament has announced a proposal for European carbon removal certification by the end of 2022 (European Parliament, 2021). Furthermore, the deployment of BECCS relies on the creation of CO<sub>2</sub> infrastructures, which may be shared with Fossil Energy with Carbon Capture and Storage (FECCS) plants. This paper aims to inform the ongoing policy discussions on carbon removal by evaluating the impact of accounting scopes on the deployment of CO<sub>2</sub> infrastructures for BECCS and FECCS. Here accounting scopes refer to the choice of value chain steps that are included in carbon removal calculation. We represent the choice of accounting scopes in the ratio  $\tau$  between

process emissions and permanently stored CO<sub>2</sub> emissions, and apply a CO<sub>2</sub> infrastructure optimization model to a topical case study in Sweden.

In our first scenario, the carbon removal accounting scope is minimal (all process emissions are ignored,  $\tau=0\%$ ). We find that a shared CO<sub>2</sub> infrastructure gathering FECCS and BECCS emitters can be deployed without subsidies starting at 95€/tCO<sub>2</sub>. However, ignoring process emissions can lead to adverse effects: there is no guarantee that BECCS processes effectively remove CO<sub>2</sub> from the atmosphere.

In our second scenario, we assume a carbon accounting method based on lifecycle assessment, which leads to a ratio between process and stored emissions of  $\tau=60\%$ . This ratio is inspired by a case study in Fajardy and Mac Dowell (2017), where the accounting scope includes value chain steps from biomass farming to CO<sub>2</sub> storage but excludes land-use change. We find that FECCS plants start investing in carbon capture and forming a CO<sub>2</sub> infrastructure at 107€/tCO<sub>2</sub> (without subsidies). We also find that BECCS plants join the infrastructure at 214€/tCO<sub>2</sub>. Consequently, the BECCS plant in our second scenario would not benefit from the typical economies of scale related to the pipeline infrastructure, which would already be tailored for the needs of FECCS plants.

Finally, we let the ratio  $\tau$  vary from 0% to 100%. Up to  $\tau=20\%$ , CO<sub>2</sub> infrastructures include both FECCS and BECCS emitters. Above  $\tau=20\%$ , the CO<sub>2</sub> value needed to trigger an infrastructure that includes BECCS emitters increases quickly, so infrastructures with only FECCS emitters are built first. Altogether, our results illustrate the challenge of BECCS lock-out, which had first been described by Vergragt et al. (2011) but had never been modeled numerically. Lomax et al. (2015) comprehensively discuss carbon removal technologies lock-out. They stress that BECCS could be locked out of future developments due to unfit infrastructures, as illustrated in our case study. CO<sub>2</sub> transportation and storage infrastructures may be built for FECCS before BECCS can be deployed, hence leaving no capacity for BECCS emitters to join a shared, less costly infrastructure.

Two main policy recommendations can be drawn from our results. First, the risk of BECCS lock-out can be reduced by incentivizing low carbon biomass supply through sustainable biomass certification.

The risk of BECCS lock-out is lower when the ratio between process emissions and stored CO<sub>2</sub> emissions is low ( $\tau < 20\%$ ). There are two ways to reduce that ratio: reducing the accounting scope, and, hence, environmental integrity; or stimulating the reduction of process emissions, in particular those related to biomass sourcing (74% of process emissions, from biomass farming to pellet grinding in Fajardy and Mac Dowell (2017)). Sustainable biomass certification frameworks – which have already been repeatedly recommended to favor BECCS deployment (Cox and Edwards, 2019; Fuss et al., 2016; Gough et al., 2018; Mac Dowell et al., 2019; Torvanger, 2019) – could ease access to low carbon biomass supply.

Second, the risk of BECCS lock-out can be reduced by encouraging a higher price for carbon removal than for carbon reduction while setting rigorous carbon removal accounting rules. In our model, we have assumed – for cost efficiency reasons – that carbon removal credits would be sold at the prevailing CO<sub>2</sub> value, which may lead to delays in BECCS investment compared to FECCS investments as BECCS is less cost-efficient. BECCS and other carbon removal options are expected to scale up soon to help contain global warming, indicating that investments should be happening now (Lomax et al., 2015; Nemet et al., 2018). Earlier investment in BECCS will stimulate learning effects and potentially long-term cost reduction (Bui et al., 2018). However, the price of carbon removal credits can only be higher than the price of carbon mitigation (e.g., within the EU ETS system) if there is enough demand for carbon removal. Some large companies aim to become carbon negative in the coming decades and have already shown a high willingness to pay for carbon removal (UNFCCC, 2021). But long-term strategies on carbon removal investment should not rely solely on private demand. Strong national commitments are needed to ensure demand for sustainable and credible carbon removal credits – for example through Nationally Determined Contributions within the Paris Agreement (Honegger et al., 2021).

As with any modeling effort, some simplifying assumptions were made. The main simplification was the use of a time-invariant carbon accounting rule that was uniformly applied to every BECCS project. The modeling presented in this paper assumes that the ratio  $\tau$  between accounted process emissions and stored emissions solely depended on the carbon removal accounting scope. Verifying whether that assumption needs to be revised to adequately capture the complex dynamics of process emissions is a



potential area for future research. Such an extension calls for the use of time-varying and project-specific ratios, requiring a much more detailed representation of the entire BECCS supply chain that is out of the scope of this paper. Should future research provide this representation, the development of an extended version of our framework could offer greater insight into the impact of carbon removal accounting on the deployment of BECCS.

## **Acknowledgments**

We thank without implicating Victor Court, Quentin Hoarau, Ibrahim Abada, Yannick Pérez, Cédric Clastres, Emily Little, Icaro Freitas Gomes, Mehdi Senouci, Filip Johnsson, Niall Mac Dowell, Solène Chiquier and Pascal Da Costa for insightful suggestions on earlier versions of this manuscript. We thank the Academic Writing Center of CentraleSupélec (Melissa Ann Thomas and Divya Madhavan Brochier) for language support. We are also indebted to seminar participants at CentraleSupélec, IFP Energies Nouvelles, French Association for Energy Economics, Climate Economics Chair, and the Center for Environmental Policy at Imperial College for useful conversations and suggestions. The remaining errors are, of course, our responsibility. This research has been supported by the Chair “*Carbon Management and Negative CO<sub>2</sub> Technologies: towards a low carbon future (CarMa)*” funded by the Tuck Foundation. That said, the views expressed herein are strictly those of the authors and must not be construed to reflect the opinions of either their affiliations or the CarMa chair.

## References

- Adriana, R.-L., Gardarsdottir, S.O., Biermann, M., Lundqvist, K., Harvey, S., 2021. Potential impact of the Preem CCS project, in: TCCS-11. CO<sub>2</sub> Capture, Transport and Storage. Trondheim 22nd–23rd June 2021 Short Papers from the 11th International Trondheim CCS Conference. SINTEF Academic Press.
- Banal-Estañol, A., Eckhause, J., Massol, O., 2016. Incentives for early adoption of carbon capture technology: Further considerations from a European perspective. *Energy Policy* 90, 246–252.
- Benhelal, E., Zahedi, G., Shamsaei, E., Bahadori, A., 2013. Global strategies and potentials to curb CO<sub>2</sub> emissions in cement industry. *J. Clean. Prod.* 51, 142–161.
- Bistline, J.E., Hodson, E., Rossmann, C.G., Creason, J., Murray, B., Barron, A.R., 2018. Electric sector policy, technological change, and US emissions reductions goals: Results from the EMF 32 model intercomparison project. *Energy Econ.* 73, 307–325.
- Bosetti, V., Marangoni, G., Borgonovo, E., Diaz Anadon, L., Barron, R., McJeon, H.C., Politis, S., Friley, P., 2015. Sensitivity to energy technology costs: A multi-model comparison analysis. *Energy Policy* 80, 244–263.
- Bui, M., Adjiman, C.S., Bardow, A., Anthony, E.J., Boston, A., Brown, S., Fennell, P.S., Fuss, S., Galindo, A., Hackett, L.A., Hallett, J.P., Herzog, H.J., Jackson, G., Kemper, J., Krevor, S., Maitland, G.C., Matuszewski, M., Metcalfe, I.S., Petit, C., Puxty, G., Reimer, J., Reiner, D.M., Rubin, E.S., Scott, S.A., Shah, N., Smit, B., Trusler, J.P.M., Webley, P., Wilcox, J., Mac Dowell, N., 2018. Carbon capture and storage (CCS). *Energy Environ. Sci.* 11, 1062–1176.
- Butnar, I., Li, P.-H., Strachan, N., Portugal Pereira, J., Gambhir, A., Smith, P., 2020. A deep dive into the modelling assumptions for biomass with carbon capture and storage (BECCS). *Environ. Res. Lett.* 15, 84008.
- Cabral, R.P., Bui, M., Mac Dowell, N., 2019. A synergistic approach for the simultaneous decarbonisation of power and industry via bioenergy with carbon capture and storage (BECCS). *Int. J. Greenh. Gas Control* 87, 221–237.
- CCS Norway, 2019. Transport and storage: Northern lights. <https://ccsnorway.com/the-project/transport-storage-equinor-shell-and-total> (accessed 10 January 2022)
- Comello, S., Reichelstein, S., 2014. Incentives for early adoption of carbon capture technology. *Energy Policy* 74, 579–588.
- Cox, E., Edwards, N.R., 2019. Beyond carbon pricing. *Clim. Policy* 19, 1144–1156.
- Di Sbroiavacca, N., Nadal, G., Lallana, F., Falzon, J., Calvin, K., 2016. Emissions reduction scenarios in the Argentinean Energy Sector. *Energy Econ.* 56, 552–563.
- EEA, 2017. European Pollutant Release and Transfer Register (E-PRTR) <http://prtr.ec.europa.eu/#/home> (accessed 21 April 2020)
- European Parliament, 2021. Legislative proposal on Carbon Removal Certification <https://www.europarl.europa.eu/legislative-train/theme-a-european-green-deal/file-carbon-removal-certification> (accessed 10 January 2022)
- Fajardy, M., Mac Dowell, N., 2020. Recognizing the Value of Collaboration in Delivering Carbon Dioxide Removal. *One Earth* 3, 214–225.

- Fajardy, M., Mac Dowell, N., 2017. Can BECCS deliver sustainable and resource efficient negative emissions? *Energy Environ. Sci.* 10, 1389–1426.
- Fuss, S., Jones, C.D., Kraxner, F., Peters, G.P., Smith, P., Tavoni, M., van Vuuren, D.P., Canadell, J.G., Jackson, R.B., Milne, J., Moreira, J.R., Nakicenovic, N., Sharifi, A., Yamagata, Y., 2016. Research priorities for negative emissions. *Environ. Res. Lett.* 11.
- Fuss, S., Lamb, W.F., Callaghan, M.W., Hilaire, J., Creutzig, F., Amann, T., Beringer, T., Oliveira Garcia, W., Hartmann, J., Khanna, T., Luderer, G., Nemet, G.F., Rogelj, J., Smith, P., Vicente, J.L.V., Wilcox, J., del Mar Zamora Dominguez, M., Minx, J.C., 2018. Negative emissions—Part 2: Costs, potentials and side effects. *Environ. Res. Lett.* 13, 63002.
- Gardarsdóttir, S., Jordal, K., Lundqvist, K., Biermann, M., Harvey, S., Gorset, O., Seglem, H., Fostås, B., 2021. Preem CCS—A Pioneering Swedish-Norwegian Collaboration Showcasing the Full CCS Chain. Available SSRN 3820698.
- Garðarsdóttir, S.Ó., Normann, F., Skagestad, R., Johnsson, F., 2018. Investment costs and CO<sub>2</sub> reduction potential of carbon capture from industrial plants – A Swedish case study. *Int. J. Greenh. Gas Control.*
- Gough, C., Garcia-Freites, S., Jones, C., Mander, S., Moore, B., Pereira, C., Röder, M., Vaughan, N., Welfle, A., 2018. Challenges to the use of BECCS as a keystone technology in pursuit of 1.5°C. *Glob. Sustain.* 1.
- Gough, C., Upham, P., 2011. Biomass energy with carbon capture and storage (BECCS or Bio-CCS). *Greenh. Gases Sci. Technol.* 1, 324–334.
- Griffin, J.M., 1979. Statistical cost analysis revisited. *Q. J. Econ.* 93, 107–129.
- Griffin, J.M., 1978. Joint production technology. *Econom. J. Econom. Soc.* 379–396.
- Griffin, J.M., 1977. Long-run production modeling with pseudo data. *Bell J. Econ.* 112–127.
- Griffin, P.W., Hammond, G.P., Norman, J.B., 2018. Industrial energy use and carbon emissions reduction in the chemicals sector. *Appl. Energy* 227, 587–602.
- Hammond, G.P., 2018. System Characterisation of Carbon Capture and Storage (CCS) Systems, in: Gough, C., Thornley, P., Mander, S., Vaughan, N., Falano, T. (Eds.), *Biomass Energy and Carbon Capture and Storage (BECCS. Unlocking Negative Emissions.* John Wiley & Sons, Hoboken NJ, pp. 395–403.
- Honegger, M., Poralla, M., Michaelowa, A., Ahonen, H.-M., 2021. Who is paying for carbon dioxide removal? Designing policy instruments for mobilizing negative emissions technologies. *Front. Clim.* 3, 672996.
- Honegger, M., Reiner, D., 2018. The political economy of negative emissions technologies. *Clim. Policy* 18, 306–321.
- Huang, X., Chang, S., Zheng, D., Zhang, X., 2020. The role of BECCS in deep decarbonization of China's economy: A computable general equilibrium analysis. *Energy Econ.* 92, 104968.
- IEA, 2017. *Energy Technology Perspectives 2017.*
- IEA, 2005. *In Building the Cost Curves for CO<sub>2</sub> Storage: European sector., Technical report.* Paris.
- IEAGHG, 2002. *Pipeline Transmission of CO<sub>2</sub> and Energy. Report Number PH 4/6, International*

- Energy Agency Greenhouse Gas R&D Program (2002).
- Johnsson, F., Normann, F., Svensson, E., 2020. Marginal abatement cost curve of industrial CO<sub>2</sub> capture and storage—a Swedish case study. *Front. Energy Res.* 8, 175.
- Kalkuhl, M., Edenhofer, O., Lessmann, K., 2015. The role of carbon capture and sequestration policies for climate change mitigation. *Environ. Resour. Econ.* 60, 55–80.
- Kemp, A.G., Kasim, A.S., 2010. A futuristic least-cost optimisation model of CO<sub>2</sub> transportation and storage in the UK/UK Continental Shelf. *Energy Policy* 38, 3652–3667.
- Kjärstad, J., Skagestad, R., Eldrup, N.H., Johnsson, F., 2016. Ship transport—A low cost and low risk CO<sub>2</sub> transport option in the Nordic countries. *Int. J. Greenh. Gas Control* 54, 168–184.
- Klokk, Ø., Schreiner, P.F., Pagès-Bernaus, A., Tomasgard, A., 2010. Optimizing a CO<sub>2</sub> value chain for the Norwegian Continental Shelf. *Energy Policy* 38, 6604–6614.
- Koelbl, B.S., van den Broek, M.A., Faaij, A.P.C., van Vuuren, D.P., 2014. Uncertainty in Carbon Capture and Storage (CCS) deployment projections. *Clim. Change* 123, 461–476.
- Krahé, M., Heidug, W., Ward, J., Smale, R., 2013. From demonstration to deployment. *Energy Policy* 60, 753–763.
- Laude, A., Jonen, C., 2013. Biomass and CCS: The influence of technical change. *Energy Policy* 60, 916–924.
- Lomax, G., Workman, M., Lenton, T., Shah, N., 2015. Reframing the policy approach to greenhouse gas removal technologies. *Energy Policy* 78, 125–136.
- Mac Dowell, N., Fajardy, M., Daggash, H., Patrizio, P., 2019. Negative emissions. *Front. Clim.* 1, 6.
- Massol, O., Tchung-Ming, S., Banal-Estanol, A., 2018. Capturing industrial CO<sub>2</sub> emissions in Spain Infrastructures, costs and break-even prices. *Energy Policy* 115, 545–560.
- Massol, O., Tchung-Ming, S., Banal-Estañol, A., 2015. Joining the CCS club! The economics of CO<sub>2</sub> pipeline projects. *Eur. J. Oper. Res.* 247, 259–275.
- Mayer, B., 2019. Bioenergy with carbon capture and storage. *Carbon Clim. Law Rev.* 13, 113–121.
- Middleton, R.S., Bielicki, J.M., 2009. A scalable infrastructure model for carbon capture and storage. *Energy Policy* 37, 1052–1060.
- Morbee, J., 2014. International Transport of Captured CO<sub>2</sub>: Who Can Gain and How Much? *Environ. Resour. Econ.* 57, 299–322.
- Morbee, J., Serpa, J., Tzimas, E., 2012. Optimised deployment of a European CO<sub>2</sub> transport network. *Int. J. Greenh. Gas Control* 7, 48–61.
- Nemet, G.F., Callaghan, M.W., Creutzig, F., Fuss, S., Hartmann, J., Hilaire, J., Lamb, W.F., Minx, J.C., Rogers, S., Smith, P., 2018. Negative emissions—Part 3: Innovation and upscaling. *Environ. Res. Lett.* 13.
- Oei, P.-Y., Mendelevitch, R., 2016. European scenarios of CO<sub>2</sub> infrastructure investment until 2050. *Energy J.* 37.
- Rajbhandari, S., Limmeechokchai, B., 2021. Assessment of greenhouse gas mitigation pathways for

- Thailand towards achievement of the 2° C and 1.5° C Paris Agreement targets. *Clim. Policy* 21, 492–513.
- Regeringskansliet, 2018. Kompletterande åtgärder för att nå negativa utsläpp av växthusgaser. (2018:70) <https://www.regeringen.se/rattsliga-dokument/kommittedirektiv/2018/07/dir.-201870/> (accessed 10 January 2022)
- Ricci, O., Selosse, S., 2013. Global and regional potential for bioelectricity with carbon capture and storage. *Energy Policy* 52, 689–698.
- Rogelj, J., Shindell, D., Jiang, K., Fifita, S., Forster, P., Ginzburg, V., Handa, C., Kheshgi, H., Kobayashi, S., Kriegler, E., 2018. Mitigation pathways compatible with 1.5 C in the context of sustainable development, Press. ed, *Global Warming of 1.5°C. An IPCC Special Report on the impacts of global warming of 1.5°C above pre-industrial levels and related global greenhouse gas emission pathways, in the context of strengthening the global response to the threat of climate change.*, Press.
- Roussanaly, S., Brunsvold, A.L., Hognes, E.S., 2014. Benchmarking of CO<sub>2</sub> transport technologies. *Int. J. Greenh. Gas Control* 28, 283–299.
- Smith, P., Davis, S.J., Creutzig, F., Fuss, S., Minx, J., Gabrielle, B., Kato, E., Jackson, R.B., Cowie, A., Kriegler, E., van Vuuren, D.P., Rogelj, J., Ciais, P., Milne, J., Canadell, J.G., McCollum, D., Peters, G., Andrew, R., Krey, V., Shrestha, G., Friedlingstein, P., Gasser, T., Grübler, A., Heidug, W.K., Jonas, M., Jones, C.D., Kraxner, F., Littleton, E., Lowe, J., Moreira, J.R., Nakicenovic, N., Obersteiner, M., Patwardhan, A., Rogner, M., Rubin, E., Sharifi, A., Torvanger, A., Yamagata, Y., Edmonds, J., Yongsung, C., 2016. Biophysical and economic limits to negative CO<sub>2</sub> emissions. *Nat. Clim. Chang.* 6, 42–50.
- Solano Rodriguez, B., Drummond, P., Ekins, P., 2017. Decarbonizing the EU energy system by 2050. *Clim. Policy* 17, S93–S110.
- Spiecker, S., Eickholt, V., Weber, C., 2014. The impact of carbon capture and storage on a decarbonized German power market. *Energy Econ.* 43, 166–177.
- Svensson, R., Odenberger, M., Johnsson, F., Strömberg, L., 2004. Transportation systems for CO<sub>2</sub>—application to carbon capture and storage. *Energy Convers. Manag.* 45, 2343–2353.
- Thornley, P., Mohr, A., 2018. Policy frameworks and supply-chain accounting. *Biomass energy with carbon capture storage* 227–250.
- Torvanger, A., 2019. Governance of bioenergy with carbon capture and storage (BECCS): accounting, rewarding, and the Paris agreement. *Clim. Policy* 19, 329–341.
- UNFCCC, 2021. Microsoft: Carbon Negative Goal. UN Glob. Clim. Action Award. <https://unfccc.int/climate-action/un-global-climate-action-awards/climate-neutral-now/microsoft-carbon-negative-goal> (accessed 10 January 2022).
- Vergragt, P.J., Markusson, N., Karlsson, H., 2011. Carbon capture and storage, bio-energy with carbon capture and storage, and the escape from the fossil-fuel lock-in. *Glob. Environ. Chang.* 21, 282–292.
- Zakkour, P., Kemper, J., Dixon, T., 2014. Incentivising and accounting for negative emission technologies, in: Zakkour, P., Kemper, J., Dixon, T. (Eds.), *Energy Procedia*.
- ZEP, 2011. CO<sub>2</sub> Storage Report.

# Supplementary document

## Appendix A – Graphical representation of the model

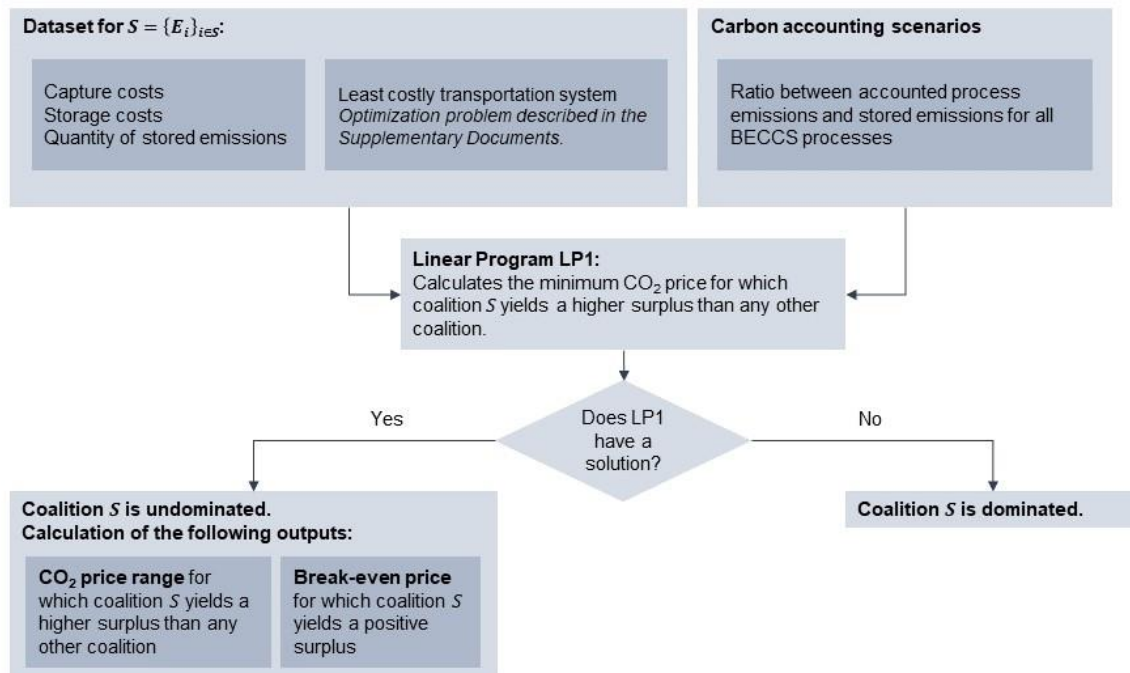


Figure 1: Graphical representation of the model

## Appendix B – Designing an optimal infrastructure

This appendix details the specifications of the optimization problem used to determine the least-cost design of an integrated transportation and storage infrastructure involving both pipelines and shipping lines.

### Notation

To begin with, we define three sets to identify the nodes of the network:

- $N = \{1, \dots, i, \dots, |N|\}$  the set gathering the emission nodes where emissions are captured;
- $K = \{1, \dots, k, \dots, |K|\}$  the set gathering the storage nodes where CO<sub>2</sub> is injected into an underground storage site;<sup>1</sup>
- $R = \{1, \dots, r, \dots, |R|\}$  the set of the network routing nodes that are not connected to either an emission node or to a storage site. These nodes typically represent an intersection between several pipeline links.

The three sets are mutually exclusive so:  $N \cap K = \emptyset$ ,  $K \cap R = \emptyset$  and  $N \cap R = \emptyset$ . For notational convenience, we also let  $Z = N \cup K \cup R$  denote the macro-set regrouping all the nodes and  $z$  is used as a generic notation for a given node in  $Z$ . We also let  $P = \{1, \dots, p, \dots, |P|\}$  denote the set of candidate pipeline links and  $L = \{1, \dots, l, \dots, |L|\}$  denote the set of candidate shipping lines.

We now present the exogenous parameters.

- $Q_i$  is the total quantity captured and injected into the network at emission node  $i$ ;
- $\bar{Q}_k$  is the maximum amount of CO<sub>2</sub> that can be injected into storage  $k$ ;

---

<sup>1</sup> In the present application, that set has only one element: the Norwegian storage site. That said, the model has a generic nature and it could be applied in other cases involving several storage sites.

- $I_{p,z}$  is an incidence parameter that only takes three values: -1 if pipeline  $p$  starts at node  $z$ , 1 if pipeline  $p$  ends at node  $z$ , and 0 otherwise;
- $J_{l,z}$  is an incidence parameter that only takes three values: -1 if shipping line  $l$  starts at node  $z$ , 1 if pipeline  $l$  ends at node  $z$ , and 0 otherwise;
- $F_p^{pipe}$  is the fixed cost incurred to open the pipeline link  $p$ ;
- $C_p^{pipe}$  is the unit cost incurred by using pipeline  $p$ ;
- $F_l^{ship}$  is the fixed cost incurred to open the shipping line  $l$ ;
- $C_l^{ship}$  is the unit shipping cost incurred by using the shipping line  $l$ ;
- $C_k^{inj}$  is the unit cost of the CO<sub>2</sub> injection operations conducted at storage  $k$ ;
- $M_{pipe}$  and  $M_{ship}$  are two arbitrarily large constants. Their values will be discussed below.

The decision variables are:

- $\delta_p$  is a binary variable that describes whether the pipeline link  $p$  is opened (i.e.,  $\delta_p = 1$ ) or closed (i.e.,  $\delta_p = 0$ );
- $q_p^+$  (respectively  $q_p^-$ ) is the non-negative quantity transported using pipeline  $p$  that flows in the direction posited for pipeline  $p$  (respectively in the opposite direction);
- $\gamma_l$  is a binary variable that describes whether the shipping line  $l$  is opened (i.e.,  $\gamma_l = 1$ ) or closed (i.e.,  $\gamma_l = 0$ );



- $q_l^{ship}$  is the non-negative quantity transported using shipping line  $l$  that flows in the direction posited for that line;
- $q_k^{inj}$  is the non-negative quantity injected into storage  $k$ .

For notational simplicity, we also let  $x_N = (\delta_p, q_p^+, q_p^-, \gamma_l, q_l^{ship}, q_k^{inj})$  be the decision vector to transport and store the emissions captured at the emission nodes in  $N$ .

### Optimization problem

The cost-minimizing design of an infrastructure gathering the emissions captured at the emissions nodes in  $N$  and transporting them to the storage site can be determined using the following mixed integer linear programming problem:

$$\text{Min}_{x_N} \quad Cost = \sum_{p \in P} [F_p^{pipe} \delta_p + C_p^{pipe} (q_p^+ + q_p^-)] + \sum_{l \in L} [F_l^{ship} \gamma_l + C_l^{ship} q_l^{ship}] + \sum_{k \in K} C_k^{inj} q_k^{inj} \quad (\text{A.1})$$

$$\text{s.t.} \quad \sum_{p \in P} I_{p,i} (q_p^+ - q_p^-) + \sum_{l \in L} J_{l,i} q_l^{ship} + Q_i = 0, \quad \forall i \in N, \quad (\text{A.2})$$

$$\sum_{p \in P} I_{p,k} (q_p^+ - q_p^-) + \sum_{l \in L} J_{l,k} q_l^{ship} = q_k^{inj}, \quad \forall k \in K, \quad (\text{A.3})$$

$$\sum_{p \in P} I_{p,r} (q_p^+ - q_p^-) + \sum_{l \in L} J_{l,r} q_l^{ship} = 0, \quad \forall r \in R, \quad (\text{A.4})$$

$$q_p^+ + q_p^- \leq \delta_p M_{pipe}, \quad \forall p \in P, \quad (\text{A.5})$$

$$q_l^{ship} \leq \gamma_l M_{ship}, \quad \forall l \in L, \quad (\text{A.6})$$

$$q_k^{inj} \leq \bar{Q}_k, \quad \forall k \in K, \quad (\text{A.7})$$

$$q_k^{inj} \geq 0, \quad \forall k \in K; \quad \delta_p \in \{0,1\}, \quad q_p^+ \geq 0, \quad q_p^- \geq 0, \quad \forall p \in P \quad \text{and} \quad \gamma_l \in \{0,1\}, \quad q_l^{ship} \geq 0, \quad \forall l \in L \quad (\text{A.8})$$

In this optimization problem, the objective function (A.1) to be minimized is the sum of the total pipeline costs, the total shipping costs, and the storage annual equivalent cost. The objective function is linear, and so are the constraints. The linear constraints (A.2), (A.3) and (A.4) respectively represent the mass balance equations at the source, storage, and intersection nodes. For each pipeline  $p$ , the constraint

(A.5) forces the binary variable  $\delta_p$  to be equal to 1 whenever a positive quantity of gas is flowing into that pipeline (whatever the flow direction) and imposes a zero flow whenever it is optimal to not build it.<sup>2</sup> For each shipping line  $l$ , the constraint (A.6) forces the binary variable  $\gamma_l$  to be equal to 1 whenever a positive quantity of gas is shipped using that shipping line and imposes a zero flow whenever it is optimal to not open it. The constraints (A.7) represent the sink injectivity constraints: at each storage node, the quantity injected cannot exceed the local injection capacity.

We let  $x_N^*$  be the solution to that problem. Observe that this solution is such that on each pipeline  $p$ , at least one of the two directed flows  $q_p^{+*}$  and  $q_p^{-*}$  must be equal to zero.<sup>3</sup>

This optimization problem is a mixed-integer linear programming problem). Given its modest size in the instances considered in the present study, a numerical solution to that problem can be obtained in a few seconds using a standard solver and a laptop.

---

<sup>2</sup> It should be noted that the value of the parameter  $M_{pipe}$  (respectively  $M_{ship}$ ) is arbitrarily set at a level that is large enough for the constraint (B.5) (respectively (B.6) to be non-binding whenever the pipeline is built (respectively the shipping line is used). In the present case, we assume that these constants equal 10 times the sum of the quantity of CO<sub>2</sub> injected at all nodes (i.e.,  $\sum_{i \in N} Q_i$ ). Such « big M » constraints are commonly used in the operations research (O.R.) literature.

<sup>3</sup> Indeed, we assume that  $x_N^*$  is a solution and that there is at least one pipeline  $p'$  with  $q_{p'}^{+*} > 0$  and  $q_{p'}^{-*} > 0$ , we consider the decision vector  $x_N^{**}$  where the pipeline flows are the net non-negative flows in each direction  $q_{p'}^{+**} = \max(q_{p'}^{+*} - q_{p'}^{-*}, 0)$ ,  $q_{p'}^{-**} = \max(q_{p'}^{-*} - q_{p'}^{+*}, 0)$  and the other variables have the same values as the ones in  $x_N^*$ . By construction,  $x_N^{**}$  also verifies the constraints (B.2)–(B.7) while yielding a lower value for the objective function (B.1) because  $q_{p'}^{+**} + q_{p'}^{-**} = |q_{p'}^{+*} - q_{p'}^{-*}|$  and thus  $C_{p'}^{pipe}(q_{p'}^{+**} + q_{p'}^{-**}) < C_{p'}^{pipe}(q_{p'}^{+*} + q_{p'}^{-*})$ . Hence, we have a contradiction because  $x_N^*$  cannot be a solution of the optimization problem.

## Appendix C – The cost of maritime transportation

In the present study, we use an empirical approach to model how the cost of a maritime shipment of CO<sub>2</sub> varies with the volume shipped and the distance to the storage site.

The Scandinavian cost engineering literature provides several detailed evaluations of the total annual cost of a maritime CO<sub>2</sub> supply chain. That chain is aimed at transporting a given annual volume of CO<sub>2</sub> on a given distance using dedicated sea-going vessels that commute between a departure port equipped with specific loading and temporary storage facilities and an offshore site where the CO<sub>2</sub> is aimed at being stored permanently (Kjärstad et al., 2016; Roussanaly et al., 2014). In this paper, we leverage on these detailed cost evaluations to identify an approximate total cost function. More specifically, we use the information in Roussanaly et al. (2014), Table 13 – a data set comprising 100 observations for the unit transportation costs incurred for a supply chain shipping a given volume (from 2 to 20 MtCO<sub>2</sub>/y by regular steps of 2 MtCO<sub>2</sub>/y) over a given distance (between 200 and 2,000 kilometers by regular steps of 200km) – to estimate an empirical cost function.<sup>4</sup>

We posit the following parsimonious specification<sup>5</sup> whereby the total annual cost  $C$  (in millions €) is modeled as a linear function of the distance  $D$  (in 1,000km), the volume shipped  $Q$  (in MtCO<sub>2</sub>/y) and the product  $D \times Q$  aimed at capturing the interactions between these two variables:

$$C = \alpha + \beta D + \gamma Q + \delta(D \times Q) + \varepsilon \quad (\text{D.1})$$

where  $\alpha$ ,  $\beta$ ,  $\gamma$  and  $\delta$  are coefficients to be estimated and  $\varepsilon$  is an error term.

---

<sup>4</sup> By construction, this approach is similar to the “pseudo data” method proposed to approximate complex engineering models using empirically-determined, single-equation cost functions (see e.g., Griffin (1979, 1978, 1977) or Massol (2011)).

<sup>5</sup> As there is no theoretical basis on which to select a particular functional form for that cost function, we have also tested a variety of other possible specifications including the simpler linear function with two explanatory variables (the distance and the volume) and several extensions including either quadratic, cubic or logged values of these variables). However, as the goodness-of-fit obtained with these more complex models was not substantially better than that obtained with our simple linear model.

An ordinary least squares estimation yields the results presented in Table D.1. The estimated coefficients are highly statistically significant, the model has an excellent goodness-of-fit, and its residuals show no signs of non-normality. Unsurprisingly, the coefficients are positive, which indicates that the cost increases with both the distance and the volume shipped. For a given distance, that shipping cost function thus exhibits a positive fixed cost component  $\alpha + \beta D$ , and the variable cost is linear with a marginal shipping cost that is equal to  $\gamma + \delta D$ . By construction, the shipping cost function obtained for a given distance, thus exhibits pronounced economies of scale.

**Table 1. Estimation results**

|                              | <b>Total annual cost</b> |         |
|------------------------------|--------------------------|---------|
| Constant                     | 24.051                   | ***     |
|                              | (1.141)                  |         |
| Distance                     | 2.307                    | **      |
|                              | (0.920)                  |         |
| Volume                       | 10.924                   | ***     |
|                              | (0.092)                  |         |
| (Distance × Volume)          | 4.004                    | ***     |
|                              | (0.074)                  |         |
| R <sup>2</sup>               | 0.9993                   |         |
| Adjusted R <sup>2</sup>      | 0.9993                   |         |
| Normality ( <i>p-value</i> ) | 1.178                    | (0.555) |

Note: The standard deviations of the estimates is reported in brackets. Asterisks indicate significance at 0.1\*, 0.05\*\* and 0.01\*\*\* levels, respectively. Normality refers to the Jarque-Bera test for the null hypothesis of normally distributed residuals.

## Appendix D – Supplementary data

**Table 2 The candidate pipelines and their lengths**

| <b>Pipeline</b> | <b>Origin</b> | <b>Destination</b> | <b>Distance (km)</b> |
|-----------------|---------------|--------------------|----------------------|
| P1              | E1            | E3                 | 72                   |
| P2              | E3            | E4                 | 30                   |
| P3              | E4            | R1                 | 168                  |
| P4              | R1            | E6                 | 28                   |
| P5              | R1            | E2                 | 60                   |
| P6              | E2            | E0                 | 54                   |
| P7              | E0            | E5                 | 70                   |
| P8              | E1            | E2                 | 217                  |
| P9              | E1            | E0                 | 238                  |
| P10             | E1            | E5                 | 284                  |

**Table 3 The candidate shipping lines and their lengths**

| <b>Line</b> | <b>Origin</b> | <b>Destination</b> | <b>Distance (km)</b> |
|-------------|---------------|--------------------|----------------------|
| L1          | E7            | S1                 | 613                  |
| L2          | E3            | S1                 | 639                  |
| L3          | E1            | S1                 | 641                  |
| L4          | E1            | E3                 | 98                   |
| L5          | E1            | E7                 | 102                  |
| L6          | E3            | E7                 | 83                   |

## References

- Griffin, J.M., 1979. Statistical cost analysis revisited. *Q. J. Econ.* 93, 107–129.
- Griffin, J.M., 1978. Joint production technology. *Econom. J. Econom. Soc.* 379–396.
- Griffin, J.M., 1977. Long-run production modeling with pseudo data. *Bell J. Econ.* 112–127.
- Kjärstad, J., Skagestad, R., Eldrup, N.H., Johnsson, F., 2016. Ship transport—A low cost and low risk CO<sub>2</sub> transport option in the Nordic countries. *Int. J. Greenh. Gas Control* 54, 168–184.
- Roussanaly, S., Brunsvold, A.L., Hognes, E.S., 2014. Benchmarking of CO<sub>2</sub> transport technologies. *Int. J. Greenh. Gas Control* 28, 283–299.
- Griffin, J.M., 1979. Statistical cost analysis revisited. *Q. J. Econ.* 93, 107–129.
- Griffin, J.M., 1978. Joint production technology. *Econom. J. Econom. Soc.* 379–396.
- Griffin, J.M., 1977. Long-run production modeling with pseudo data. *Bell J. Econ.* 112–127.
- Kjärstad, J., Skagestad, R., Eldrup, N.H., Johnsson, F., 2016. Ship transport—A low cost and low risk CO<sub>2</sub> transport option in the Nordic countries. *Int. J. Greenh. Gas Control* 54, 168–184.
- Roussanaly, S., Brunsvold, A.L., Hognes, E.S., 2014. Benchmarking of CO<sub>2</sub> transport technologies. *Int. J. Greenh. Gas Control* 28, 283–299.



Find the entire collection here:

<https://www.ifpenergiesnouvelles.com/article/ifpen-economic-papers>



228 - 232 avenue Napoléon Bonaparte  
92852 Rueil-Malmaison  
[www.ifpschool.com](http://www.ifpschool.com)



1-4 avenue de Bois-Préau  
92852 Rueil-Malmaison  
[www.ifpenergiesnouvelles.fr](http://www.ifpenergiesnouvelles.fr)

